



Model	Battery	Solar Panel	Material	Dimension	CCT	Radar Sensor	Luminous Flux
WD-169A	LiFePO4 66AH	18V58W	Die casting aluminum	780*468*153mm	6500K	Yes	170LM/W

Advantage:

- 1.High lumen output ,brightness increased 30% by SMD5050 LED
- 2.18V Fast charge ,charing efficiency increased 50%
- 3.365 days lighting during radar mode by smart power management system
- 4.Convenient installation ,electricity free
- 5.Aluminum die casting housing



Model	Battery	Solar Panel	Material	Dimension	CCT	Radar Sensor	Luminous Flux
WD-169B	LiFePO4 120AH	18V85W	Die casting aluminum	1080*468*153mm	6500K	Yes	170LM/W

Advantage:

- 1.High lumen output ,brightness increased 30% by SMD5050 LED
- 2.18V Fast charge ,charing efficiency increased 50%
- 3.365 days lighting during radar mode by smart power management system
- 4.Convenient installation ,electricity free
- 5.Aluminum die casting housing



Model	Battery	Solar Panel	Material	Dimension	CCT	Radar Sensor	Luminous Flux
WD-168	LiFePO4 24AH	5V21W	Die casting aluminum	660*240*72mm	6500K	No	170LM/W

Advantage:

- 1.High lumen output ,brightness increased 30% by SMD2835 LED
- 2.18V Fast charge ,charing efficiency increased 50%
- 3.365 days lighting during radar mode by smart power management system
- 4.Convenient installation ,electricity free
- 5.Aluminum die casting housing



Model	Battery	Solar Panel	Material	Dimension	CCT	Radar Sensor	Luminous Flux
WD-EW800	LiFePO4 32Ah	4V/30W	AL+PC(Anti-UV)	φ580*H248mm	WW / W / RGB	Optional	2029lm
WD-EW1200	LiFePO4 48Ah	4V/40W	AL+PC(Anti-UV)	φ580*H248mm	WW / W / RGB	Optional	2679lm

Advantage:

- 1.Slope design, not easy to accumulate dust, ensure charging efficiency
- 2.Easy installation, moveable casing tube reduces transportation cost
- 3.APP intelligent control, RGB music rhythm function
- 4.Intelligent extended function, compatible with other Bluetooth devices
- 5.Warm White/Cool White/16 million colors selectable,360° beaming angle.
- 6.High-efficiency charging solution, charging efficiency improved by 50%
- 7.Intelligent power management system, super long discharge time

NEW



Model:	WD-QP-30	WD-QP-50
Power (LED):	30W	50W
Light source	SMD2835 42pcs	SMD2835 84pcs
Lumens: Max.	2700LM	4500LM
Lighting mode:	100%-OFF-50%-OFF	
Beam angle:	120°	
Color temp.:	3000K/4000K/5000K/6500K	
Color rendering index (RA):	>80	
Color consistency (SDCM):	<6	
Cable:	1.5mm ² 2m	
Outdoor protection:	IP54	

NEW



Model:	WD-961	WD-962
Power (LED):	150W	210W
Light source	SMD2835	SMD2835
Lumens: Max.	15000LM	21000LM
Material	Aluminium+Glass	
Beam angle:	120°	
Color temp.:	3000K/4000K/5000K/6500K	
Color rendering index (RA):	>80	
Color consistency (SDCM):	<6	
Cable:	1.0mm ² 3m	
Outdoor protection:	IP65	



Model No.WD--2000

Feature	With Magnet leg &Hanging Hook
Power	20W
LED	SMD2835
Luminous Flux	2500lm (Max)
Material	ABS+Glass
Voltage	DC18-21V/AC110-240V
Product Size	227*197*164mm
Compatible With	Dewalt,Milwaukee ,Black&Decker,PorterCableDecker, Stanley ,Makita;Bosch,Hikoki/Hilti ,Metabao



Model No.WD-3000

Feature	With Magnet leg &Hanging Hook
Power	30W
LED	SMD2835
Luminous Flux	4000lm (Max)
Material	ABS+Glass
Voltage	DC18-21V/AC110-240V
Product Size	227*197*164mm
Compatible With	Dewalt,Milwaukee ,Black&Decker,PorterCableDecker, Stanley ,Makita;Bosch,Hikoki/Hilti ,Metabao



Model No.WD-4000

Feature	With Magnet leg &Hanging Hook
Battery	5000mAh 18650 Li-ion Battery
Power	25W
LED	SMD2835
Luminous Flux	3000lm (Max)
Material	Aluminum die casting+Glass
Voltage	DC7.4V/AC110-240V
Product Size	227*197*164mm



Model No.WD-2500/WD-3500

Feature	With Magnet leg &Hanging Hook
Power	25W
LED	SMD2835
Luminous Flux	2500lm/3500lm
Material	ABS+Glass
Voltage	DC18-21V/AC110-240V
Product Size	255 * 355 * 200mm
Compatible With	Dewalt,Milwaukee ,Black&Decker,PorterCableDecker, Stanley ,Makita;Bosch



Model No.WD-552

LED Super Bright Cob Led
Material Aluminum Housing With Magnetic Base
Voltage 3.7 Volt Lithium-Ion Battery
Size 255*32mm
Feature Rechargeable



Model No.WD-553

LED Super Bright Cob Led
Material Aluminum Housing With Magnetic Base
Voltage 3.7 Volt Lithium-Ion Battery
Size 318*32mm
Feature Rechargeable




Model No.WD-501

LED Super Bright Cob Led
Material ABS Housing With Magnetic Base
Voltage 3.7 Volt Lithium-Ion Battery
Size 205*40mm
Feature Rechargeable




Model No.WD-502

LED Super Bright Cob Led
Material ABS Housing With Magnetic Base
Voltage 3.7 Volt Lithium-Ion Battery
Size 272*47mm
Feature Rechargeable




Model No.WD-559

LED Super Bright COB Led
Material ABS+TPR
Battery 2*1200mah battery
Size 124*55*40
Run Time 2-3 Hours
Feature Rechargeable




Model No.WD-560

LED Super Bright COB Led
Material ABS+TPR
Battery 1200mah battery
Size 110*45*30
Run Time 2-3 Hours
Feature Rechargeable




Model No.WD-WTL9105

LED Super Bright Cob Led
Material Rubber+Aluminum
Voltage 3.7 Volt Lithium-Ion Battery
Size L:85mm*W:55mm*H:120mm
Feature Rechargeable




Model No.WD-892-2

LED Super Bright Led
Material Rubber+Aluminum
Voltage 3.7 Volt Lithium-Ion Battery
Size L:85mm*W:55mm*H:120mm
Feature Rechargeable




Model No.WD-RHL016

LED Super Bright Cob Led
Material ABS+TPR
Battery 1*5000mah polyer battery
Size 252*207*50mm
Feature Rechargeable




Model No.WD-834

LED Super Bright Cob Led
Material Nylon+TPR
Voltage 3.7 Volt Lithium-Ion Battery
Size 173*127*50mm
Feature Rechargeable



Model No.WD-877-2

LED Super Bright SMD Led
Material ABS+TPR
Battery 3*1200mah polyer battery
Size 205*165*300mm
Run Time 3-4 Hours
Feature Rechargeable++Solar charger



Model No.WD-878-1

LED Super Bright SMD Led
Material ABS+TPR
Battery 6*1200mah battery
Size 234*166*332mm
Run Time 3-4 Hours
Feature Rechargeable+Solar charger



Model No.WD-8100B

LED Super Bright Cob Led
Material ABS
Voltage 3.7 Volt Lithium-Ion Battery
Size 224*140*235mm
Run Time 3-4 Hours
Feature Rechargeable



A
E Model No.WD-910

Power	10W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	143*143*225mm
Tripod Type	H Portable Type/Floding Type/S Type



A
E Model No.WD-911

Power	20W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	143*143*225mm
Tripod Type	H Portable Type/Floding Type/S Type



A
E Model No.WD-915

Power	70W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	295*190*355mm
Tripod Type	H Portable Type/Floding Type/S Type



A
E Model No.WD-916

Power	100W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	375*200*380mm
Tripod Type	H Portable Type/Floding Type/S Type



A
E Model No.WD-913

Power	30W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	215*155*260mm
Tripod Type	H Portable Type/Floding Type/S Type



A
E Model No.WD-914

Power	50W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	275*155*325mm
Tripod Type	H Portable Type/Floding Type/S Type



A
E Model No.WD-917

Power	150W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	375*200*280mm
Tripod Type	H Portable Type



A
E Model No.WD-918

Power	100W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	295*190*355mm
Tripod Type	H Portable Type



1000lm	30.000h
1.5 m	6.500 K 4.500 K 2.700 K IP 65

A
E Model No.WD-900

Power	10W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	170*130*210mm
Tripod Type	Floding Type/H Portable Type/S Type



2000lm	30.000h
1.5 m	6.500 K 4.500 K 2.700 K IP 65

A
E Model No.WD-901

Power	20W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	185*140*230mm
Tripod Type	Floding Type/H Portable Type/S Type



10000lm	30.000h
1.5 m	6.500 K 4.500 K 2.700 K IP 65

A
E Model No.WD-904

Power	100W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	30*170*340mm
Tripod Type	Floding Type/H Portable Type/S Type



MAX 20000lm	30.000h
1.5 m	6.500 K 4.500 K 2.700 K IP 65

A
E Model No.WD-928

Model	Lumens	Watt	CABLE	IP
WD-928A	5000lm	50W	1.5m	IP65
WD-928B	10000lm	100W	1.5m	IP65
WD-928C	15000lm	150W	1.5m	IP65
WD-928D	20000lm	200W	1.5m	IP65



3000lm	30.000h
1.5 m	6.500 K 4.500 K 2.700 K IP 65

A
E Model No.WD-902


Power	30W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	225*160*260mm
Tripod Type	Floding Type/H Portable Type/S Type



5000lm	30.000h
1.5 m	6.500 K 4.500 K 2.700 K IP 65

A
E Model No.WD-903

Power	50W
LED	SMD2835
Material	Aluminium+Glass
Voltage	AC120/AC230V
Product Size	270*170*305mm
Tripod Type	Floding Type/H Portable Type/S Type



A
E Model No.WD-920

Model	Lumens	Watt	CABLE	IP
WD-920A	6000lm	60W	1.5m	IP65
WD-920B	6000lm	60W	1.5m	IP65

6000lm	30.000h	1.5 m	6.500 K 4.500 K 2.700 K IP 65
--------	---------	-------	--



A
E Model No.WD-930

Model	Lumens	Watt	CABLE	IP
WD-930A	5000lm	50W	1.5m	IP65
WD-930B	10000lm	100W	1.5m	IP65

5000lm 10000lm	30.000h	1.5 m	6.500 K 4.500 K 2.700 K IP 65
-------------------	---------	-------	--




WD-900110
Portable Work Light 10Watt



WD-900120
Portable Work Light 20Watt



WD-900130
Portable Work Light 30Watt

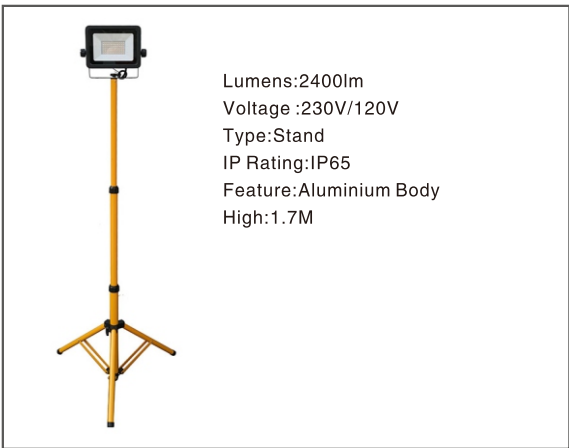

WD-371 AC Stand Work Light 30Watt



WD-471 AC Stand Work Light 50Watt



WD-161 AC Stand Work Light 10Watt




WD-261 AC Stand Work Light 20Watt



WD-361 AC Stand Work Light 30Watt




WD-461 AC Stand Work Light 50Watt

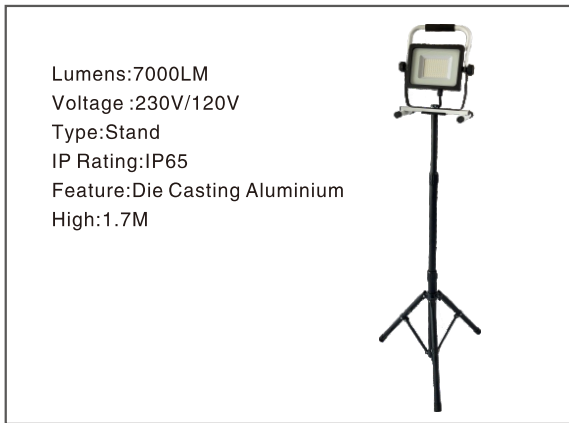


WD-561 AC Stand Work Light 70Watt



WD-661 AC Stand Work Light 100Watt

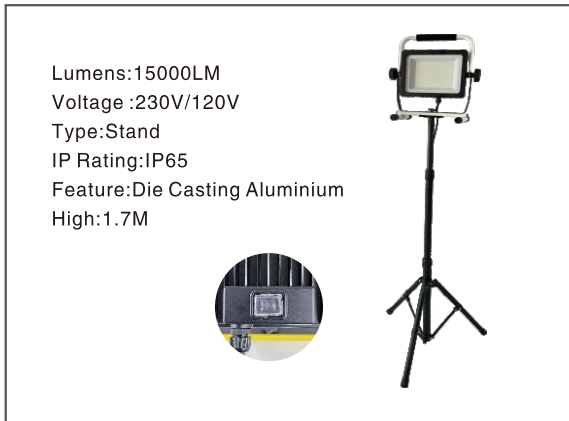

WD-761 AC Stand Work Light 150Watt

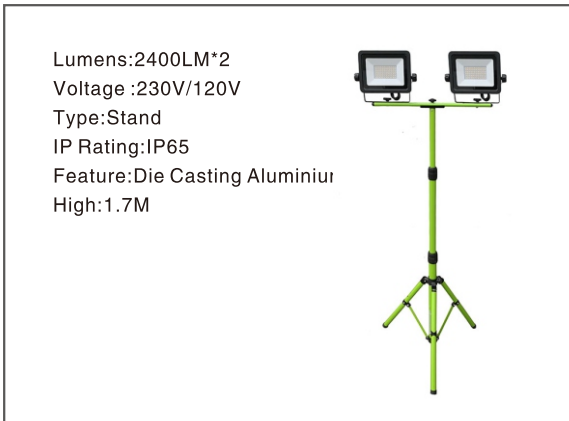

WD-370 AC Stand Work Light 30Watt*2



A
E WD-470 AC Stand Work Light 50Watt*2



A
E WD-260 AC Stand Work Light 20Watt*2




A
E WD-760 AC Stand Work Light 100Watt*2




A
E WD-860 AC Stand Work Light 150Watt*2



A
E WD-360 AC Stand Work Light 30Watt*2

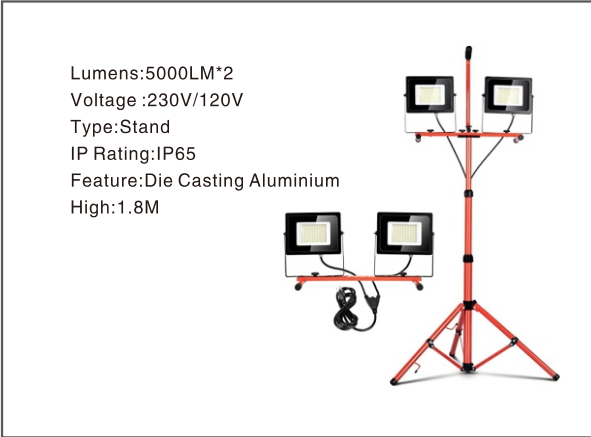


A
E WD-460 AC Stand Work Light 50Watt*2

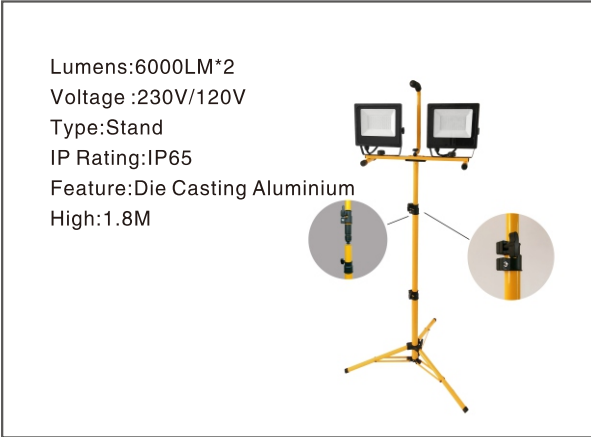


A
E WD-960 AC Stand Work Light 60Watt *2




A
E WD-900530 AC Stand Work Light 30Watt*2

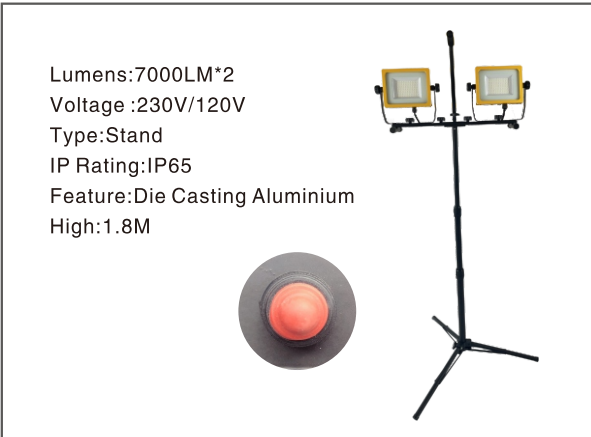


A
E WD-560 AC Stand Work Light 70Watt*2

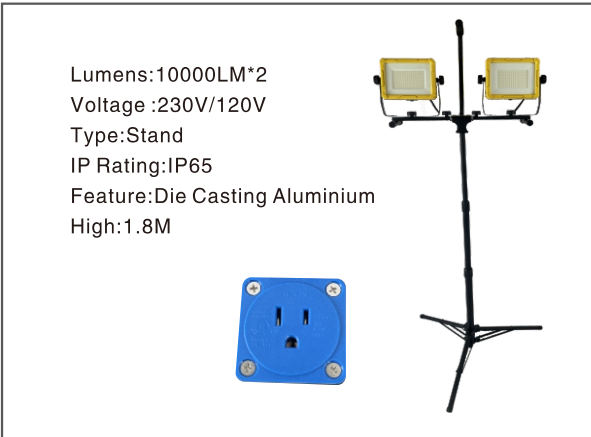

A
E WD-660 AC Stand Work Light 100Watt*2

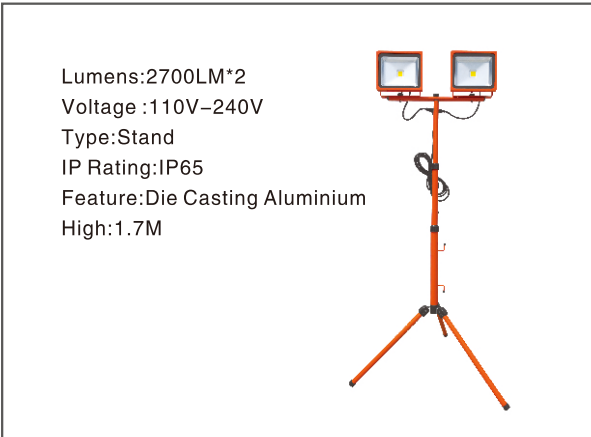

A
E WD-900430 AC Stand Work Light 30Watt*2

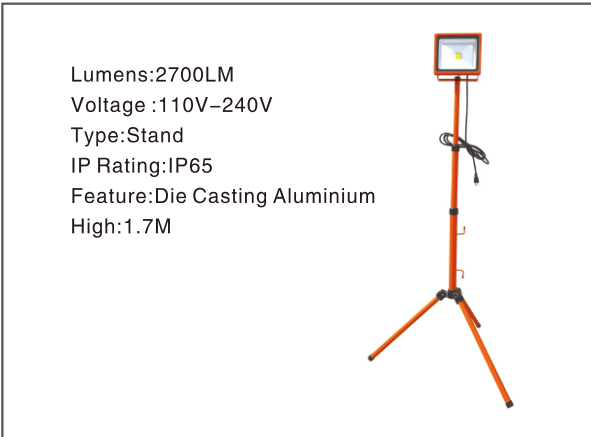

A
E WD-900330 AC Stand Work Light 30Watt



Model	WD-N821	WD-N822	WD-N823
Watt	30W/50W/60W	100W/120W/150W	180W/200W
CHIP	SMD3030/XTE	SMD3030/XTE	SMD3030/XTE
LED Array	8C9B	6C30B	8C36B
IP Rating	IP65	IP65	IP65
Pipe diameter	Φ54	Φ65	Φ74
Size	518*228*114mm	750*322*145mm	900*386*167mm



Model	WD-807	WD-808	WD-809
Watt	30W/50W/60W	100W/120W/150W	180W/200W
CHIP	SMD3030/XTE	SMD3030/XTE	SMD3030/XTE
LED Array	8C9B	6C30B	8C36B
IP Rating	IP65	IP65	IP65
Pipe diameter	Φ54	Φ65	Φ74
Size	518*228*114mm	750*322*145mm	900*386*167mm



Model	WD-X817H	WD-X818H	WD-X819H	WD-X820H
Watt	30W/40W/50W	60W/80W	100W/120W/150W	180W/200W
CHIP	SMD3030	SMD3030	SMD3030	SMD3030
LED Array	6C6B/6C12B	6C12B/6C16B	6C24B/6C30B	6C40B
N.W	2.7kgs	4.3kgs	5.6kgs	9.8kgs
Pipe diameter	Φ52	Φ63	Φ63	Φ63
Size	520*212*90mm	616*259*186mm	677*305*187mm	850*366*198



Model	WD-003A	WD-003B
Watt	30w-60W	80W-100W
IP Rating	IP66	IP66
Lens	4in1(5050)/6in1(5050)12in1(3030)	4in1(5050)/6in1(5050)12in1(3030)
Photocell Base	With	With
Material	Die casting Aluminium	Die casting Aluminium
Pipe diameter	Φ60	Φ60
Size	513*180*85 mm	613*206*84 mm



Model	WD-004A	WD-004B
Watt	30w-60W	80W-100W
IP Rating	IP66	IP66
Lens	4in1(5050)/6in1(5050)12in1(3030)	4in1(5050)/6in1(5050)12in1(3030)
Photocell Base	With	With
Material	Die casting Aluminium	Die casting Aluminium
Pipe diameter	Φ60	Φ60
Size	439*180*76 mm	539*206*79 mm



Model	WD-001A	WD-001B
Watt	60w-100W	120W-150W
IP Rating	IP66	IP66
Lens	4in1(5050)/6in1(5050)12in1(3030)	4in1(5050)/6in1(5050)12in1(3030)
Photocell Base	With	With
Material	Die casting Aluminium	Die casting Aluminium
Pipe diameter	Φ60	Φ60
Size	664*243*96 mm	719*291*96 mm



Model	WD-150	WD-151	WD-152	WD-153	WD-154	WD-155	WD-156	WD-157
Watt	10W	20W	30W	50W	100W	200W	300W	400W
Lumen	900lm	1800lm	2700lm	4500lm	9000lm	18000lm	27000lm	36000lm
IP Rating	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP66
Light source	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Light Angle	130°	130°	130°	130°	130°	130°	130°	130°



Model	WD-250	WD-251	WD-252	WD-253	WD-254	WD-255	WD-256
Watt	10W	20W	30W	50W	100W	150W	200W
Lumen	900lm	1800lm	2700lm	4500lm	9000lm	18000lm	27000lm
IP Rating	IP66	IP66	IP66	IP66	IP66	IP66	IP66
Light source	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Light Angle	110°	110°	110°	110°	110°	110°	110°



Model	Voitage	Watt	Lumens	CCT
WD-170A	230V	50W	7000LM	2700K/4500K/6500K
WD-170B	230V	100W	14000LM	2700K/4500K/6500K
WD-170C	230V	150W	20000LM	2700K/4500K/6500K
WD-170D	230V	200W	27000LM	2700K/4500K/6500K
WD-170E	230V	50W	40000LM	2700K/4500K/6500K



Model	WD-U525	WD-U526	WD-U527
Watt	100w	150w	200w
Lumen	8000lm	12000lm	16000lm
LED Chip	SMD2835	SMD2835	SMD2835
Material	Aluminum	Aluminum	Aluminum
N.W	1400g	2200g	3000g
Size	285*285*90mm	340*340*100mm	405*405*120mm

Model	WD-U523	WD-U524
Watt	100W/150W	200W
Input Voltage	AC100-240V 50/60Hz	AC100-240V 50/60Hz
Beam Angle	60°/120°	60°/120°
Chip	SMD2835/3030	SMD2835/3030
Size	330*330*170mm	430*430*190mm



Product Code	WD-017A	WD-017B	WD-017C
	2pcs Lumileds 3030	2pcs Lumileds 3030	2pcs Lumileds 3030
LED driver	InVentronics	inventronics	inventronics
Color Temperature	2700K/4500K/6500K	2700K/4500K/6500K	2700K/4500K/6500K
Luminous Flux	5200LM	5200LM	5200LM
Input Voltage	AC100-277V	AC100-277V	AC100-277V
Frequency Range	50/60Hz	50/60Hz	50/60Hz
LED Lifetime	50000h	50000h	50000h
Warranty	5 years	5 years	5 years
Protection Grade	IP65	IP65	IP65
IK Grade	IK08	IK08	IK08
Installation Pipe Diameter	Φ76mm	Φ60mm	Φ76mm
Net Weight	6.5kg	6.5kg	7.0kg
Packing Size	545*545*120mm	545*545*120mm	545*545*120mm



Item	Name	High	Sections	Pipe Diameter
WD-T501	Umbrella Type	64-160cm	Section III	Φ25/Φ32/Φ38
	伞型支架			
Material	Steel pipe			
Package	10pcs/ctn(63.5*23.5*47cm); G.W.:20 kgs			



Item	Name	High	Sections	Pipe Diameter
WD-T502	Double flat iron Type	64-160cm	Section III	Φ25/Φ32/Φ38
	双扁铁支架			
Material	Steel pipe			
Package:	10pcs/ctn(63.5*23.5*53); G.W.:21 kgs			



Item	Name	High	Sections	Pipe Diameter
WD-T503	Round Type	64-157cm	Section III	Φ25/Φ32/Φ38
	元宝支架			
Material	Steel pipe			
Package:	10pcs/ctn(66*27.5*58.5cm) ; G.W.:21 kgs 4pcs/ctn(68*29.5*25.5) ; G.W.:9 kgs			



Item	Name	High	Sections	Pipe Diameter
WD-T504	2m Tripod	81-200cm	Section III	Φ25/Φ32/Φ38
	2米支架			
Material	Steel pipe			
Package:	6pcs/ctn(79*24*29); G.W.:18 kgs			



Item	Name	High	Sections	Pipe Diameter
WD-T505	3m Tripod	121-300cm	Section III	Φ25/Φ32/Φ38
	3米支架			
Material	Steel pipe			
Package:	6pcs/ctn(136.5*36.5*38.5); G.W.:26 kgs			



Item	Name	High	Sections	Pipe Diameter
WD-T506	Heavy duty	90-180cm	Section III	Φ25/Φ32/Φ38
	重型支架			
Material	Steel pipe			
Package:	6PC /CTN(63*34.5*49.5CM) ; G.W.:18 kgs			



Item	Name	High	Sections	Pipe Diameter
WD-T507	Simple Type	80-130cm	Section II	Φ25/Φ32
	简易支架			
Material	Steel pipe			



Item	Name	High	Sections	Pipe Diameter
WD-T508	Simple Type	80-130cm	Section II	Φ25/Φ32
	简易支架			
Material	Steel pipe			



Item	Name	High	Sections	Pipe Diameter
WD-T509	Spring support	64-160cm	Section III	Φ38/Φ32/Φ25
	彈簧支架			
Material	Steel pipe			



Item	Name	High	load	Pipe Diameter
WD-T510	2.1m Tripod	96-210cm	50kgs	Φ38/Φ32/Φ25
	2.1m支架			
Material	Steel pipe			